

Diesel Anti Smoke (DAS)

Diesel Anti Smoke

Product properties

Diesel Anti Smoke significantly reduces exhaust smoke and unpleasant knocking of all stationary and mobile diesel engines. It increases the Cetane number of diesel fuels. The product ensures perfect lubrication of all moving parts within the diesel system and therefore provides a clean and powerful combustion. Protects the complete system against corrosion.

Area of application

For use in diesel powered engines. Recommended for engines with particle filter, turbo and catalytic converter.

Application

Fill directly into the diesel tank. Observe the mixing ratio!

Consumption

150ml sufficient for 60 liters diesel. Mixing ratio: 1:400

Reaction time

while engine is running

Technical data

Physical state: liquid

Colour: yellow

Odour: characteristic

Initial boiling point and boiling range: 200 - 210 °C

Flashpoint: > 65 °C

Lower explosion limit: > 0,6 Vol.-%


Upper explosion limit: > 7,0 Vol.-%

Ignition temperature: > 200 °C

Density at 68 °F: 0,810 - 0,825 g/cm³

Water resistant

Available sizes	Item no.	PU
150ml	P2151	24

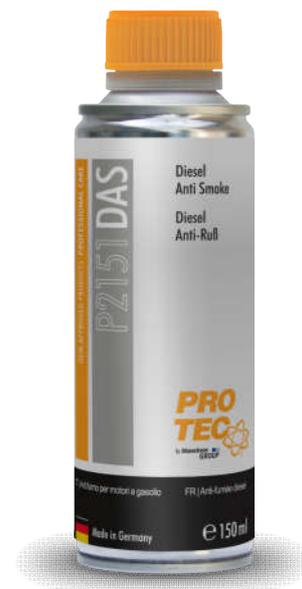

Our information is based on careful examination and may be considered as reliable. However, all information supplied is non-binding advise. No liability for any printing errors. Technical modifications and errors are exempted.